



Mayo 2019
LiDAR and Airphoto
Data Capture and Processing

LiDAR and Air Photo Report

Our File:
2611 19372-04

Submitted To:

Highways and Public Works | Transportation Aviation Branch | W-16
T 867-455-2883 | Yukon.ca

Yukon Geomatics

Submitted By:

McElhanney Ltd.

200-858 Beatty Street

Vancouver, BC

V6B 1C1

Tel: (604) 424 4784

Contact: Azadeh Koohzare, PhD., PEng.

March 3, 2020

Table of Contents

1.	Introduction.....	3
2.	Mission Plan.....	3
3.	Equipment.....	4
4.	Flight Plan	5
5.	Data Processing.....	7
6.	Point Density.....	8
7.	Calibration.....	8
8.	Quality Control.....	9
9.	Deliverables	9

List of Figures and Tables

Figure 1	Aerial survey	3
Figure 2	Optech Galaxy components	4
Figure 3	Phase One components	4
Table 1	Flight Parameters	5
Table 2	Flight Parameters	6

1. Introduction

McElhanney Ltd (MCSL) performed a LiDAR and aerial photography acquisition for Mayo airport, shown in Figure 1.

The site was flown on June 11, 2019 in conjunction with another project. This report describes the acquisition, post-processing and quality control methodology used to produce the final elevation models.

2. Mission Plan

Project: Mayo LiDAR and Aerial photo Project

Date: 2019-06-10 and 2019-06-11

Location: Mayo Airport

Topography: low relief

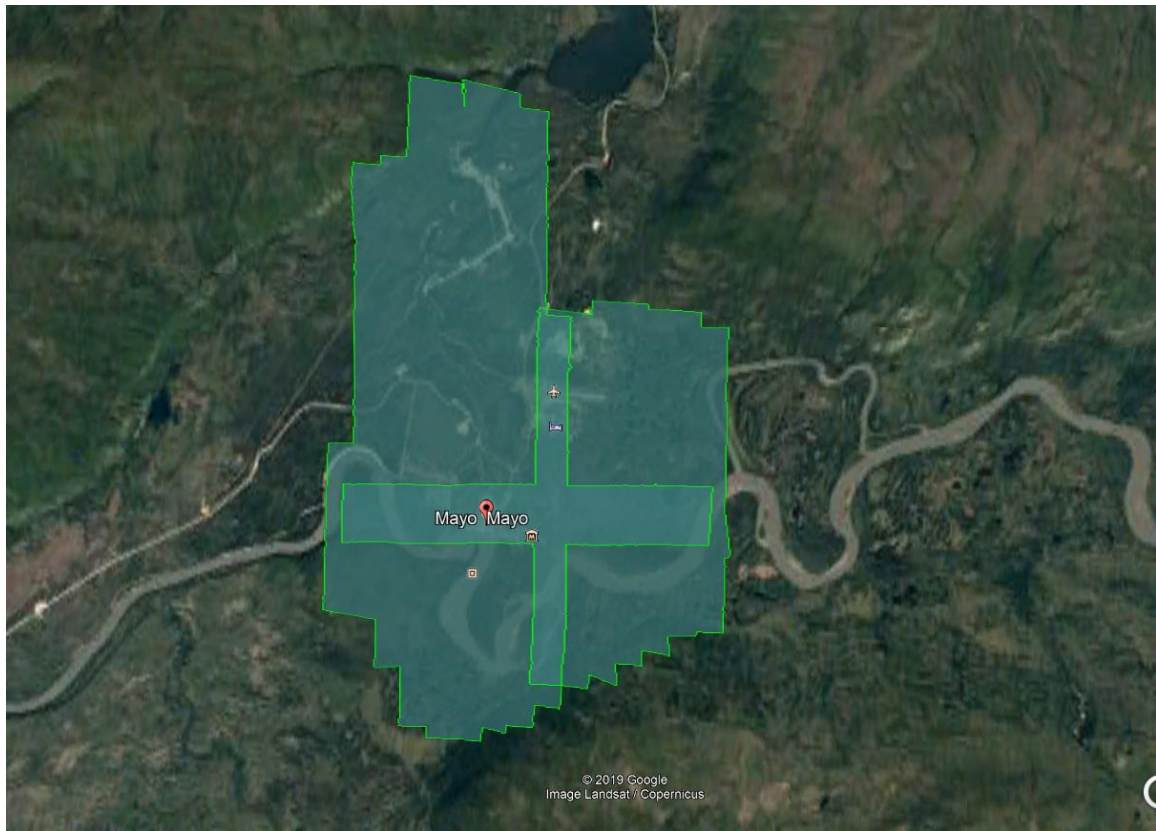


Figure 1– LiDAR Survey Site

3. Equipment

McElhanney utilized the Optech Galaxy system for LiDAR Capture (Figure 2).

For Product Specifications of Optech Galaxy please see

<http://www.teledyneoptech.com/index.php/product/optech-altm-galaxy/>

The Galaxy was mounted on Piper Navajo fixed wing Aircraft.



Figure 2 – Optech Galaxy components

On Board Camera Phase One iXU-RS1000 RGB simultaneous capture (Figure 3.)

Phase One Industrial – Cameras iXU-RS1000 series



iXU-RS1000 series

Camera Type	iXU-RS1000
Camera Specifications	
Lens type	Rodenstock / Schneider-Kreuznach
Focal length F (mm)	RS lenses: 32, 40, 50, 70, 90, 110, 150 SK lenses: 28, 55, 80, 110, 150, 240
FOV (across line, deg)	86.5 (28mm) – 12.9 (240mm)
FOV (along flight line, deg)	70.3 (28mm) – 9.7 (240mm)
Aperture	f/5.6
Exposure principle	Leaf shutter
Exposure (sec)	1/2000 to 1/125
Image capture rate	1 frame every 0.6 sec
Light Sensitivity (ISO)	50-6400
Dynamic Range (db)	>84
Spectral characteristics	R,G,B
Sensor Specifications	
CMOS pixel size (µm)	4.6
CMOS array (pix)	11,608 x 8,708
Analog-to-digital-conversion (bit)	14
Frame / Image Specifications	
Frame geometry	Central projection
Image size (pixel)	11,608 x 8,708
Image volume (MP)	100
Color	RGB or NIR
Typical image size (MB)	300
Image format	Phase One RAW, TIFF, JPEG
Operational Specifications	
Power Consumption	< 10W
Dimensions (depends on lens)	97.4 x 93 x <218 mm
Weight (depends on lens)	< 2 kg

PHASE ONE
Specialty Imaging Solutions

Figure 3 – Phase One Camera Series

4. Flight Plan

Table 1: Flight Parameters- 2019-06-10

Strip ID	Start [s]	Stop [s]	PRF [kHz]	Scan Frequency [Hz]	Scan Swath [deg]	Speed Avg [m/s]	Height Avg [m]
1	153461.4	153480.5	19.2	550	66	50	77.3
2	155605.2	155748.6	143.3	600	66	50	73.4
3	155871.3	156023	151.7	600	66	50	69.1
4	156141.9	156275.9	134	600	66	50	78.4
5	156394.9	156535.4	140.5	600	66	50	74.4
6	156663.7	156808.9	145.2	600	66	50	72.1
7	156925	157012.3	87.3	600	66	50	70.4
8	157164.9	157248.5	83.6	600	66	50	73.9
9	157359.9	157444.5	84.5	600	66	50	72.8
10	157578.3	157661.9	83.6	600	66	50	74.1
11	157772.5	157857.9	85.4	600	66	50	72.3
12	158001.2	158154.7	153.6	600	66	50	72
13	160203.8	160289.3	85.4	600	66	50	72.7
14	160412	160505.8	93.8	600	66	50	71.4
15	160644.4	160734.5	90.1	600	66	50	77.8
16	160887	160986.5	99.4	600	66	50	74
17	161141.9	161239.4	97.6	600	66	50	77.1
18	161364.9	161470.9	106	600	66	50	73.7
19	161614.1	161719.2	105.1	600	66	50	75.1

Table 2: Flight Parameters- 2019-06-11

Strip ID	Start [s]	Stop [s]	PRF [kHz]	Scan Frequency [Hz]	Scan Swath [deg]	Speed Avg [m/s]	Height Avg [m]
1	233844.2	233954.9	110.7	600	66	50	71.4
2	234078.5	234235.8	157.3	600	66	50	78.3
3	234350.1	234536.4	186.2	600	66	50	69.3
4	234660.9	234827.6	166.7	600	66	50	78.6
5	234952.1	235134.6	182.5	600	66	50	70.7
6	235258.3	235404.4	146.1	600	66	50	75.7
7	235527.1	235659.2	132.1	600	66	50	69.6
8	235762.3	235811.3	49	600	66	50	74.6
9	235916.3	236019.5	103.2	600	66	50	75.4
10	236409.1	236492.7	83.6	600	66	50	73.9
11	236614.4	236693.3	78.9	600	66	50	77.5
12	238315	238660.8	345.9	600	66	50	83.7
13	238791.9	239145.2	353.3	500	66	50	82
14	239321.1	239635.2	314.1	500	66	50	81.7
15	239769.1	240045.9	276.8	500	66	50	79.2
16	240191	240423.9	232.9	500	66	50	77.9
17	240502.7	240507	4.3	500	66	50	71.2
18	240519.5	240695.5	176	500	66	50	76.1
19	240956.3	241086.6	130.3	500	66	50	80.5
20	242293.8	242441.8	148	550	66	50	80.5
21	242596.2	242662.1	65.9	550	66	50	73.8
22	242784.7	242892.6	107.8	550	66	50	71.7
23	242996.6	243117.5	120.9	550	66	50	78.5
24	243226.2	243560.9	334.7	550	66	50	79.4
25	243664.9	244036.9	372	550	66	50	75.2

Strip ID	Start [s]	Stop [s]	PRF [kHz]	Scan Frequency [Hz]	Scan Swath [deg]	Speed Avg [m/s]	Height Avg [m]
26	244155.8	244534.3	378.5	550	66	50	77.2
27	244703.7	245093.4	389.7	550	66	50	78.5

5. Data Processing

All GPS and IMU data was processed using PosPac MMS 8.4 software. The laser data was extracted using Teledyne Optech LMS software. The GPS antenna position in the airplane was calculated by post-processing the raw data at 1 second intervals for the entire flight.

We have used Precise Point Positioning (PPP) for the airborne GPS processing, and the coordinates were calculated in NAD83-CSRS.

The airborne positions were combined with the post-processed platform (aircraft) attitude information to generate a time tagged position and orientation solution.

The standard deviation of the airborne GPS solution for using KAR (Kinematics Ambiguity Resolution) was estimated to be 0.03, 0.04 and 0.05m in East, North and height directions, respectively.

The estimated values for the GPS antenna position were used with the laser ranges and platform angles to compute all the individual X, Y, and Z coordinates for each laser return in each flight line. The result is a processed point cloud containing all measured points.

6. Point Density

Bare earth point density varies with canopy closure, understory density and topographic features. Mean density of the point cloud was measured at nominal 21.4 pts/m² and the Bare earth point density was measured at nominal 5.4 pts/m².

7. Calibration

System: Optech ALTM Galaxy S/N 5060392

LiDAR Calibration flight:

Calibration Date: June 14, 2019 Location: Whitehorse, Yukon

The LiDAR system calibration was flown over calibration site. The lever arms (offset between GPS antenna IMU and Laser Mirror), were measured as:

Lever Arms

GPS Lever arms in (m):

x: 0.28 y: -0.445 z: -1.196

IMU Lever arms in (m):

x: 0 y: 0 z: 0

There were a total number of 10 flight lines for calibration: 9 basic orthogonal lines for LMS software analysis and 1 redundant line for better accuracy. The lines were planned as follow:

Flight line direction: 3 lines north – south and 3 lines east – west and 1-line NW-SE
All GPS with IMU data was processed using PosPac Applanix software v.8.3. and the laser data was extracted using LMS v.4.3 The GPS antenna position in the airplane was calculated by post-processing the raw data at 1 second intervals for the entire flight.

The calibration values used for this project are as follows:

imu_ex: 0.049404867 arcsec
imu_ey: -0.062994531 arcsec
imu_ez: -0.131591982 arcsec

8. Quality Control

The LiDAR data consistencies have been checked between the flight lines using Terrascan software.

Comparison of Bare Earth LiDAR data with Ground Survey Values

According to ASPRS guidelines, the vertical accuracy of LiDAR is as follows:

$$RMSE_z = \text{Sqrt}[\sum (Z_{Lidar(i)} - Z_{check(i)})^2 / n] = 0.10 \text{ m}$$

Where the "Check" refers to the ground truth (In this project, we used survey points which are at least three times more accurate than the individual LiDAR points) and n is the number of check points. LiDAR 2019 was checked vs road center line points from 2014 LiDAR dataset. A total of 414 ground check points were used for this analysis.

Average dz	+0.005
Minimum dz	-0.140
Maximum dz	+0.340
Average magnitude	0.084
Root mean square	0.105
Std deviation	0.105

9. Deliverables

Final output data is provided in NAD83CSRS UTM N8 and the elevations are based on CGVD28 HT2 geoid model. The deliverables include:

- Bare Earth & Thinned model key points in las, xyz
- Non Bare Earth in las format
- Index map
- 15 cm Orthophoto
- Technical report